

The JFG 12 elements are outside to inside flow direction gas filtration elements specifically designed for gas filtration. Through the combination of a specialized glass fiber coalescing media in a varying scale of fiber diameters, this graded density depth style design provides the optimum combination of solid contaminant holding capability and liquid particle coalescing capability. The glass filter media is supported with a heavy-duty, spiral locked steel core. Steel end caps are then mechanically secured to center core providing cartridge strength you can trust not to collapse or bypass when properly applied.


## Performance

Standard Micron Rating	1 $\mu$
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Operating Temperature	300° F
Collapse Pressure	> 75 psid
Flow Direction	Outside to In
Configuration	Double Open End

## Materials

<b>Coalescing Media:</b>	Fiber glass
<b>Support:</b>	Cotton
<b>Core:</b>	Tinned Steel
<b>End Caps:</b>	Tinned Steel
<b>Gaskets:</b>	Buna

Jonell  
 900 Industrial Pkwy P.O. Box 1092  
 Breckenridge Texas 76424 USA  
 Telephone: 254-559-7591

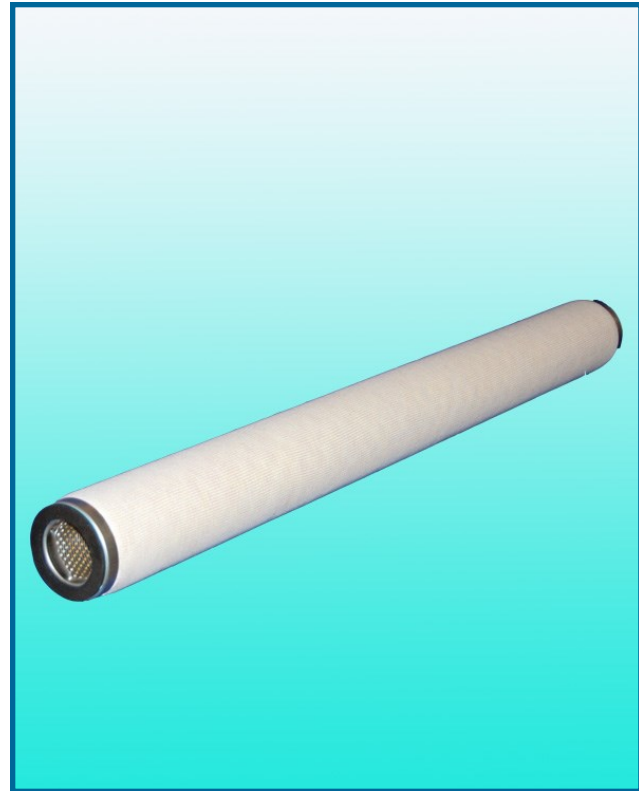

JFG 12 Filter Cartridges

## Dimensions

Length	12 inches
Outside Diameter	3.5 inches
Inside Diameter	2.09 inches
Flow Pattern	Outside to In
Quantity	4 per box
Approx. Shipping Wt.	5 lbs. per box
Box Dimensions	9.5" x 9.5" x 12.5"

*\*Above dimensions are nominal in inches*

*\*For Custom Engineered Products and Solutions... Consult Factory*

Visit us at [www.Jonellinc.com](http://www.Jonellinc.com)

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

