



A Filtration Group Company

# JFG 36

The JFG 36 series elements are large diameter outside to inside flow direction elements specifically designed for gas filtration. Through the combination of a specialized glass fiber coalescing media in a varying scale of fiber diameters, this graded density depth style design provides the optimum combination of solid contaminant holding capability and liquid particle coalescing capability. The glass filter media is supported with a heavy-duty, spiral locked steel core. Electro galvanized steel end caps are then mechanically secured to the center core providing cartridge strength you can trust not to collapse or bypass when properly applied.

## Performance


Standard Micron Rating	1 $\mu$ at 98% efficiency
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Operating Temperature	275°F
Collapse Pressure	> 75 psid
Flow Direction	Outside to In
Configuration	Double Open End

## Materials

<b>Coalescing Media:</b>	Fiberglass
<b>Support:</b>	Cotton
<b>Core:</b>	Tinned Steel
<b>End Caps:</b>	Tinned Steel
<b>Gaskets:</b>	Buna

*\*For Custom Engineered Products and Solutions... Consult Factory*

**Jonell**  
900 Industrial Pkwy P.O. Box 1092  
Breckenridge Texas 76424 USA  
Telephone: 254-559-7591  
Fax: 254-559-9863  
sales@jonellinc.com

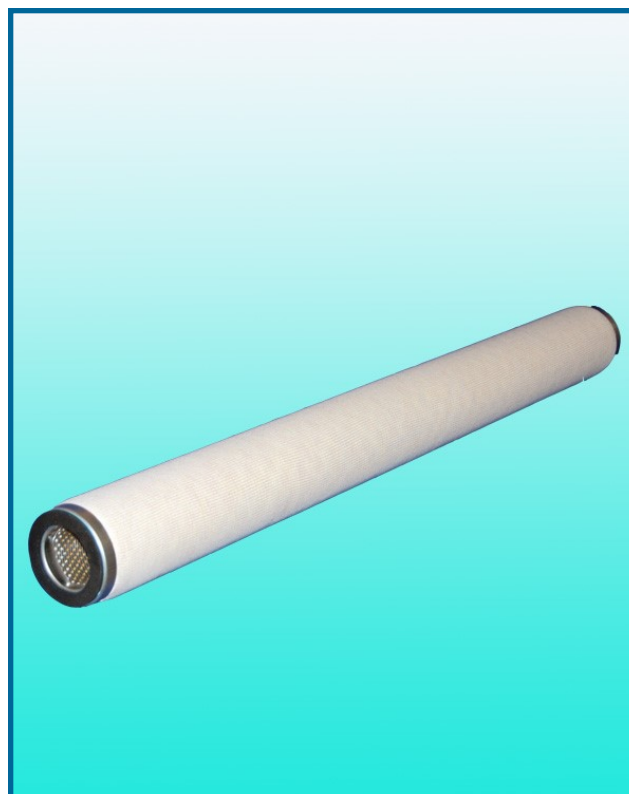

*JFG 36 Filter Cartridges*

## Dimensions

Length	36 inches
Outside Diameter	3.3 inches
Inside Diameter	2 inches
Quantity	4 per box
Approx. Shipping Wt.	10 lbs. per box
Box Dimensions	7.5" x 7.5" x 36.5"

*\*Above dimensions are nominal in inches*

**Visit us at [www.Jonellinc.com](http://www.Jonellinc.com)**

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

