JMG 12-R




The Jonell JMG 12-R coalescing filter cartridges are high efficiency, inside to outside flow direction elements specifically designed for the removal of liquid and solid contaminant in critical applications.

JMG's are available in various grades of absolute rated high performance Microglass media with hardware customizable to suit your application.

Performance

Standard Micron Rating	0.3 μ
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Temperature	275° F
Burst Pressure	> 75 psid
Flow Direction	Inside to Out
Configuration	Double Open End
	With Flat Gasket

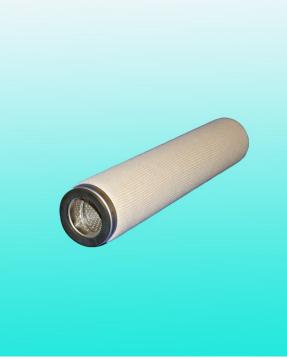

JMG 12-R Filter Cartridges

Dimensions

Length	12 inches
Outside Diameter	3.56 inches
Inside Diameter	2 inches
Flow Pattern	Inside to Out
Quantity	4 per box
Approx. Shipping Wt.	8 lbs. per box
Box Dimensions	7 1/2 x 7 1/2 x 24 1/2

*Above dimensions are nominal in inches

*For Custom Engineered Products and Solutions... Consult Factory

Buna

Microglass

Carbon Steel Carbon Steel

Carbon Steel

Needled Polyester



Materials

Drain Layer:

Core:

Supports:

End Caps:

Gaskets:

Coalescing Media:

900 Industrial Pkwy P.O. Box 1092 Breckenridge Texas 76424 USA Telephone: 254-559-7591 Fax: 254-559-9863 sales@jonellinc.com

Visit us at www.Jonellinc.com

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

JMG-12-R