


# JPMG 4536-R-RD

## Vapor Phase Coalescing

The Jonell Micro-LOK G series filter cartridges are high efficiency, inside to outside flow direction elements specifically designed for the removal of liquid and solid contaminant in critical applications.

Jonell JPMG's are available in various grades of absolute rated high performance microglass media with hardware customizable to suit your application.

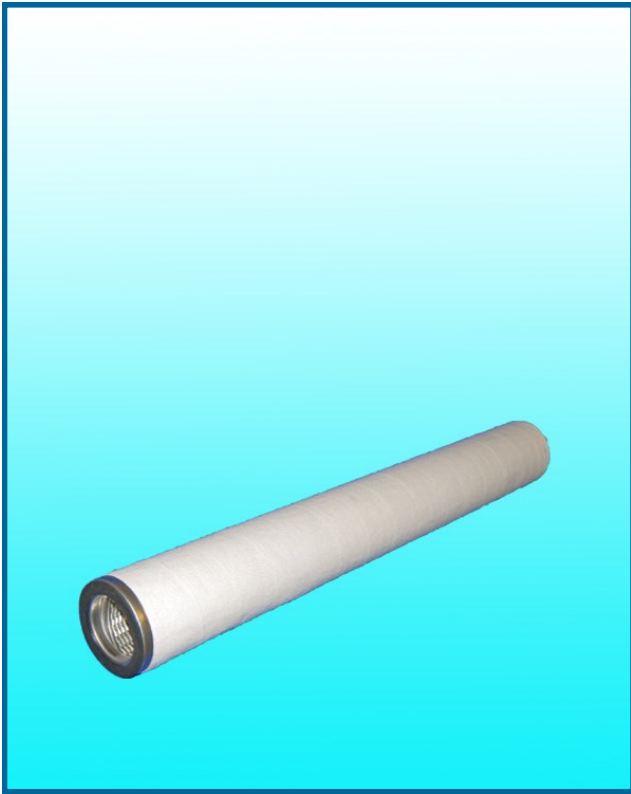

JPMG 4536-R-RD Filter Cartridges\*

W: [processtechnologies.filtrationgroup.com/en-US](http://processtechnologies.filtrationgroup.com/en-US)

ISO 9001:2015 Certified

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

## Performance

Standard Micron Rating	0.3 $\mu$ at 99.98% efficiency
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Temperature	275° F
Maximum DP	> 75 psid
Flow Direction	Inside to Out
Configuration	Double Open End

## Materials

Media	Microglass
Drain Layer	Needled Polyester
Core	Tinned Steel
Supports	Tinned Steel
End Caps	Tinned Steel
Gaskets	Buna

## Dimensions

Length	36 inches
Outside Diameter	4.25 inches
Inside Diameter	3.1 inches
Quantity	4 per box

*Dimensions are nominal in inches*

*\* Picture is for illustrative purposes only. Actual product appearance may vary.*

JPMG 4536-R-RD-0821