



A Filtration Group Company

JPMK 36229-10-X

The Jonell JPMK 36229-10-X filter cartridges are high efficiency, outside to inside flow direction elements specifically designed for the removal of solid contaminant in critical applications.


JPMKs are available in various grades of absolute rated high performance cellulose, micro glass, and polyester media with hardware customizable to suit your application.

Performance

Standard Micron Rating	10 μ
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Temperature	275° F
Collapse Pressure	> 75 psid
Flow Direction	Outside to Inside
Configuration	Single Open End

Materials

Coalescing Media:	Cellulose/Polyester
Core:	Tinned Steel
Supports:	Tinned Steel
End Caps:	Nylon
Gaskets:	Buna

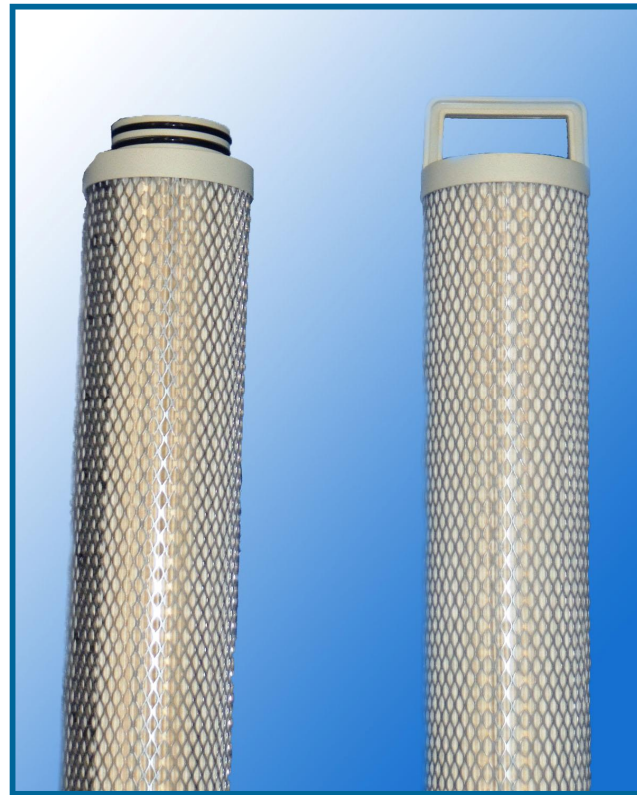

JPMK 36229-10-X Filter Cartridges

Dimensions

Length	36.19 inches
Outside Diameter	3.75 inches
Inside Diameter	1.35 inches
Flow Pattern	Outside to Inside
Quantity	4 per box
Approx. Shipping Wt.	16 lbs. per box
Box Dimensions	39 1/8 x 8 x 8

**Above dimensions are nominal in inches*

LIQUID FILTRATION



A Filtration Group Company

900 Industrial Pkwy P.O. Box 1092
Breckenridge Texas 76424 USA
Telephone: 254-559-7591
Fax: 254-559-9863
sales@jonellinc.com

Visit us at www.jonellinc.com

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

ISO 9001:2008
Certified