
JFG 24-MP-1

Gas Filtration

The Jonell Depth-LOK series filter cartridge are large diameter outside to inside flow direction elements specifically designed for gas filtration. Through the combination of a specialized glass fiber coalescing media in a varying scale of fiber diameters, this graded density depth style design provides the optimum combination of solid contaminant holding capability and liquid particle coalescing capability.

The glass filter media is supported with a heavy-duty, spiral locked steel core. Steel end caps are then mechanically secured to the center core providing cartridge strength you can trust not to collapse or bypass when properly applied.

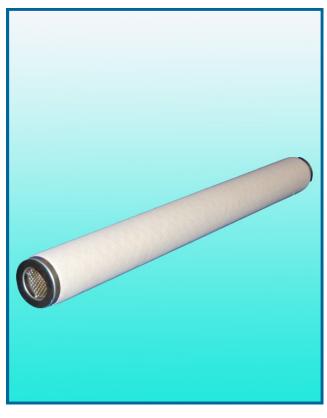

JFG 24-MP-1 Filter Cartridges*

W: processtechnologies.filtrationgroup.com/en-US ISO 9001:2015 Certified

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

Performance

Standard Micron Rating	0.3 μ at 98% efficiency
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Temperature	275° F
Maximum DP	> 75 psid
Flow Direction	Outside to In
Configuration	Double Open End

Materials

Media	Fiberglass
Core	Tinned Steel
End Caps	Tinned Steel
Supports	Cotton
Gaskets	Buna

Dimensions

Length	24 inches
Outside Diameter	3.3 inches
Inside Diameter	2 inches
Quantity	4 per box

Dimensions are nominal in inches

* Picture is for illustrative purposes only. Actual product appearance may vary.

JFG 24-MP-1-0319

